

# FR Series 300W Regulated High Voltage DC Power Supplies

## 1 kV to 60 kV Rack Mount 1.75 Inch Panel Height...

## Laboratory Performance...

## CE and Semi S2-93 Compliant

The FR Series of 300 watt high voltage supplies feature flexible embedded controls with low ripple and noise. They are air insulated, fast response units, with tight regulation and extremely low arc discharge currents.

The FR Series are fully compliant with the following European Directives:  
EN61000-3-2, Line Harmonics, with F22 option  
EN61010/ IEC1010, Safety  
EN61000-6-4, Conducted and Radiated Emissions  
EN61000-6-2:2005, Conducted and Radiated Immunity



Models from 0 to 1 kV through 0 to 60 kV, 1.75" H x 20.0" D, 14 lbs.

### Features:

**Arc Quench.** The HV output is inhibited for a short period after each load arc to help extinguish the arc.

**Arc Count.** Internal circuitry constantly senses and integrates arcs that occur over a given time. In the event a system or load arcing problem develops and exceeds factory-set parameters, the power supply will cycle off in an attempt to clear the fault and then automatically restart after a pre-set "off dwell time".

**Pulse-Width Modulation.** Off-the-line pulse-width modulation provides high efficiency and a reduced parts count for improved reliability.

**Embedded Microcontroller control.** Front panel digital encoders provide high resolution local adjustment of voltage and current program. Integral RS-232, USB and optional ethernet communications provide remote control program and monitor.

**Low Ripple.** Typically, ripple is less than 0.025% RMS of rated voltage at full load.

**Air Insulated.** The FR Series features "air" as the primary dielectric medium. No oil or encapsulation is used to impede serviceability or increase weight.

**Constant Voltage/Constant Current Operation.** Automatic crossover from constant-voltage to constant-current regulation provides protection against overloads, arcs, and short circuits.

**Redundant Thermal Overload Protection.** Thermostats and fan RPM sensing shut down the power supply due to over temperature or reduced fan speeds.

**Tight Regulation.** Voltage regulation is better than 0.005% for allowable line and load variations. Current regulation is better than 0.1% from short circuit to rated voltage.

**Constant Current/Current Trip.** A rear panel switch allows selection of either current mode.

**Slow Start.** Adjustable ramp time from 0 - 30 seconds. Output ramps from 0 V to programmed voltage level.

**Warranty.** Standard power supplies are warranted for three years; OEM and modified power supplies are warranted for one year. A formal warranty statement is available.



Designing Solutions for High Voltage Power Supply Applications

## GLASSMAN HIGH VOLTAGE INC.

124 West Main Street, PO Box 317, High Bridge, NJ 08829-0317  
(908) 638-3800 • Fax (908) 638-3700 • [www.glassmanhv.com](http://www.glassmanhv.com)

**GLASSMAN EUROPE Limited (UK)**  
+44 1256 883007 FAX +44 1256 883017  
E-mail: [Glassman\\_europe@glassmanhv.com](mailto:Glassman_europe@glassmanhv.com)

**GLASSMAN JAPAN High Voltage Limited**  
+81 45 902 9988 FAX +81 45 902 2268  
E-mail: [Glassman\\_japan@glassmanhv.com](mailto:Glassman_japan@glassmanhv.com)

# Specifications

(Specifications apply from 5% to 100% rated voltage. Operation is guaranteed down to zero voltage with a slight degradation of performance.)

**Input:** User selectable via rear panel switch, 102 - 132 V RMS or 198 to 264 VRMS single-phase, 48-63 Hz, 600 VA maximum at full load. C14 connector per IEC 60320 with mating line cords  
**SHIPPED SET FOR 198 to 264**

**Efficiency:** Typically greater than 85% at full load.

**Output:** Continuous, stable adjustment, from 0 to rated voltage or current by panel mounted optical rotary encoder or by external +10V signals. Voltage accuracy is 0.5% of setting + 0.2% of rated. Optical rotary encoder resolution: 0.025% with "Fine Adjustment" mode selected. 0.25% with "Coarse Adjustment" mode (default). Repeatability is < 0.1% of rated.

**Static Voltage Regulation:** Better than  $\pm 0.005\%$  for specified line variations and  $0.005\% + 0.5 \text{ mV/mA}$  for no load to full load variations.

**Dynamic Voltage Regulation:** For load transients from 10% to 99% and 99% to 10%, typical deviation is less than 2% of rated output voltage with recovery to within 1% in 500 us and recovery to within 0.1% in 1 ms.

**Ripple:** Better than 0.025% of rated voltage + 0.5 V RMS at full load.

**Current Regulation:** When in current regulation mode, better than 0.1% from short circuit to rated voltage at any load condition.

**Voltage Monitor:** 0 to +10 V equivalent to 0 to rated voltage. Accuracy: 0.5% of reading + 0.2% of rated. Impedance is  $10 \text{ K}\Omega$ .

**Current Monitor:** 0 to +10 V equivalent to 0 to rated current. Accuracy: 1% of reading + 0.1% of rated. Impedance is  $10 \text{ K}\Omega$ .

**Stability:** 0.01% per hour after 1/2 hour warm-up, 0.05% per 8 hours.

**Voltage Rise/Decay Time Constant:** The voltage rise time constant is 50 ms typical for all models using either HV enable or remote programming control. The voltage decay time constant is 50 ms with a 50% resistive load for 12 kV to 60 kV models and 50 ms with a 10% resistive load for 1 kV to 10 kV models.

**Temperature Coefficient:** 0.01% /°C.

**Ambient Temperature:** -20 to +40° C, operating; -40 to +85° C, storage.

**Polarity:** Available with either positive, negative or reversible polarity with respect to chassis ground.

**Protection:** Automatic current regulation protects against all overloads, including arcs and short circuits. Thermal switches and RPM sensing fans protect against thermal overload. Fuses, surge-limiting resistors, and low energy components provide ultimate protection.

**Arc Quench:** An arc quench feature provides sensing of each load arc and quickly inhibits the HV output for approximately 20 ms after each arc. Standard on 8 - 60 kV models; optional on 1- 6 kV models.

**Arc Count:** Internal circuitry senses the number of arcs caused by external load discharges. If the rate of consecutive arcs exceeds approximately one arc per second for five arcs, the supply will turn off for approximately 5 seconds to allow clearance of the fault. After this period the supply will automatically return to the programmed kV value with the rise time constant indicated. If the load fault still exists, the above cycle will repeat. Standard on 8 - 60 kV models; optional on 1- 6 kV models.

**External Interlock:** Open = off, closed = on. Normally latching except for blank front panel version where it is non-latching.

**Remote HV Enable/Disable:** 0 - 1.5 V = OFF, 2.5 - 15 V = ON.

**RS232/USB/Ethernet Programming and Monitor Accuracy:**

**Resolution:** 0.025% of full scale for both the voltage and the current programs. 0.1% of full scale for both the voltage and the current monitors

**Remote setting accuracy:** Voltage setting accuracy is better than 0.5% of setting + 0.2% of rated.

**Remote reading accuracy:** Voltage reading accuracy is 0.5% of reading + 0.2% of rated. Current reading accuracy is 1% of reading + 0.1% of rated.

**Front Panel Elements.**

**Output Voltage & Current Display:** 3.5 Digit digital meters. 1250 count maximum.

**Indicators:** AC Power, Current Mode, Voltage Mode, Pol +, Pol -, Fault, Fine Adjustment, Preset, Control Lock, Remote Enable, Remote Program, HV On.

**AC Power:** Rocker switch

**Switches (momentary):** HV On, SS Slope, Standby, Remote Enable, Remote Program, Preset, Fine Adjust, Control Lock.

**Rotary Encoders:** Voltage Adjust, Current Adjust..

**Rear Panel Elements.** AC power entry connector, fuses, power on indicator, ground stud, HV output connector, remote interface connector, RS232/USB connectors, and input voltage selector switch.

The signals provided on the remote interface connector are as follows:

**Inputs:** Safety interlock, output voltage and current program signals, high voltage enable and remote HV on.

**Outputs:** Output voltage and current monitor signals, HV status, fault status, I/V mode status and a +10 V reference source.

Signal common and ground reference terminals are also provided.

**Accessories:** Detachable, 8 foot, shielded high voltage coaxial cable (see models chart for cable type), 6 foot NEMA 5-15 line cord, 6 foot NEMA 6-15 line cord, 10 foot null modem cable and 10 foot USB cable are provided.


**Weight:** Approximately 14 lbs.

# Options

Symbol	Description
A	100/200 VAC $\pm$ 10%, 48 - 63 Hz, Selectable. Shipped set for 200 VAC.
F22	Required for CE Compliance - 220 VAC Power Factor Corrected. AC Input line rated for 198 - 264 VAC, 48 - 63 Hz, 400 VA maximum. Active correction circuitry achieves an input line current harmonic content well below the maximum specified in EN61000-3-2. (AC Line voltage selector switch removed.) One NEMA 6-15 cord provided.
NC	Blank front panel, power switch and indicator only.
ZR	Zero start interlock. Voltage control, local or remote, must be at zero before the HV will enable.
5VC	0-5 V voltage and current program/monitor.
ARC	Arc count and quench as described in the specifications for 1 - 6 kV models.
AC	Arc Count Only
AQ	Arc Quench Only
ETH	Virtual RS-232 COM port over Ethernet network. (Requires compatible OS (eg Windows) for COM drivers)

# Models

Positive Polarity	Negative Polarity	Reversible Polarity	Output Voltage	Output Current	Max Stored Energy	Output Cable
FR1P300	FR1N300	FR1R300	0-1kV	0-300mA	0.35J	RG-58U
FR1.5P200	FR1.5N200	FR1.5R200	0-1.5kV	0-200mA	0.5J	RG-58U
FR2P150	FR2N150	FR2R150	0-2kV	0-150mA	0.3J	RG-58U
FR3P100	FR3N100	FR3R100	0-3kV	0-100mA	0.7J	RG-58U
FR5P60	FR5N60	FR5R60	0-5kV	0-60mA	0.4J	RG-58U
FR6P50	FR6N50	FR6R50	0-6kV	0-50mA	0.55J	RG-8U
FR8P37	FR8N37	FR8R37	0-8kV	0-37mA	0.4J	RG-8U
FR10P30	FR10N30	FR10R30	0-10kV	0-30mA	0.6J	RG-8U
FR12P25	FR12N25	FR12R25	0-12kV	0-25mA	0.85J	RG-8U
FR15P20	FR15N20	FR15R20	0-15kV	0-20mA	0.75J	RG-8U
FR20P15	FR20N15	FR20R15	0-20kV	0-15mA	1.2J	RG-8U
FR25P12	FR25N12	FR25R12	0-25kV	0-12mA	1.3J	RG-8U
FR30P10	FR30N10	FR30R10	0-30kV	0-10mA	1.8J	RG-8U
FR40P7.5	FR40N7.5	FR40R7.5	0-40kV	0-7.5mA	2.4J	RG-8U
FR50P6	FR50N6	FR50R6	0-50kV	0-6mA	3.0J	RG-8U
FR60P5	FR60N5	FR60R5	0-60kV	0-5mA	3.5J	RG-8U

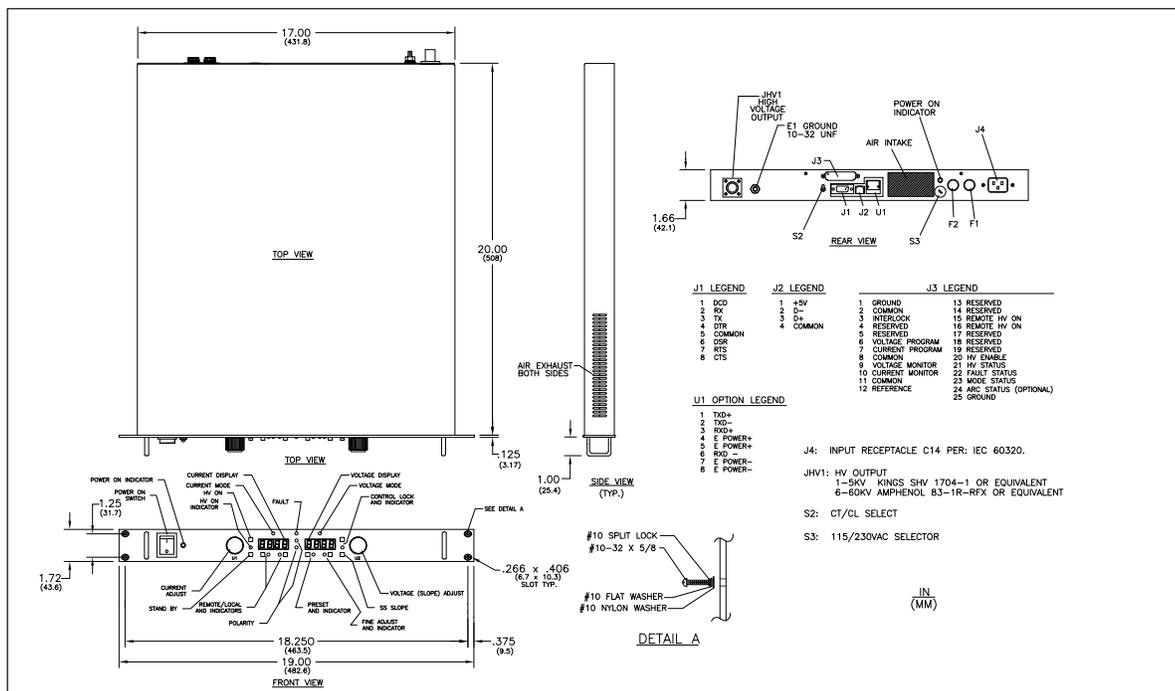



*Designing Solutions for High Voltage Power Supply Applications*

**GLASSMAN HIGH VOLTAGE INC.**

124 West Main Street, PO Box 317, High Bridge, NJ 08829-0317  
(908) 638-3800 • Fax (908) 638-3700 • [www.glassmanhv.com](http://www.glassmanhv.com)